

"Construction Tough"

Fans & Blowers

- Ventilate manholes, tanks and confined spaces
- Ductable as blower and/or exhauster
- Safe models for hazardous locations
- Maintains safe, ventilated workspace
- Rugged steel housing and screen construction

Model FN20



Stackable

SPECIFICATIONS	
Size/Type	20"/Direct Drive
Motor	1/2 HP/TEAO 1725 RPM
Electrical	115 Volts 7 amp circuit
Rating	5000 CFM
Weight	74 lbs.
Dimensions	20"D x 23"W x 27"H

SURE FLAME®

sold

exclusively by

heat wagon 

Model FN42



**Pivots To
Seven
Positions**

**Eyehooks
For
Overhead
Lifting**

SPECIFICATIONS	
Size/Type	42"/Belt Drive
Motor	1 HP/TEAO 1725 RPM
Electrical	115 Volts 15 amp circuit
Rating	14,000 CFM
Weight	210 lbs.
Dimensions	26"D x 50"W x 51"H

Model UB12E




**Explosion
Proof**

**CSA Approved
For Class 1
Group D
Hazardous
Locations**

SPECIFICATIONS	
Size/Type	12"
Motor	1 HP/3450 RPM
Electrical	115 Volts 15 amp circuit
Rating	2900 CFM
Static Pressure (in w.c.)	1-3/4", Ductable up to 100'
Weight	72 lbs.
Dimensions	24" x 12" x 17"

Model UB18

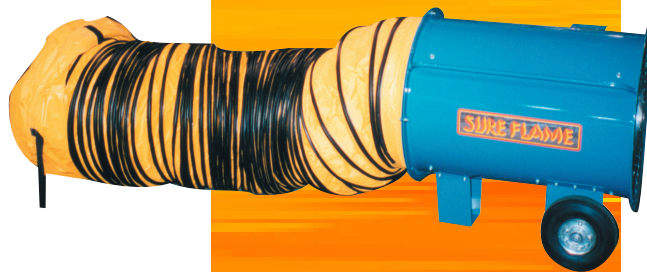

SPECIFICATIONS	
Size/Type	18"
Motor	1 HP/TEAO/1725 RPM
Electrical	115 Volts 15 amp circuit
Rating	5000 CFM
Static Press. (in w.c.)	1/2", Ductable up to 50'
Weight	108 lbs.
Dimensions	26" x 22" x 26"

heat wagon 

342 N. 400 E. Valparaiso, IN 46383

219-464-8818 • 219-462-7985 • www.heatwagon.com